


GMA-D + PDT model



For the production of PVC, PET-G, A-PET, PET-GAG soft fold cases

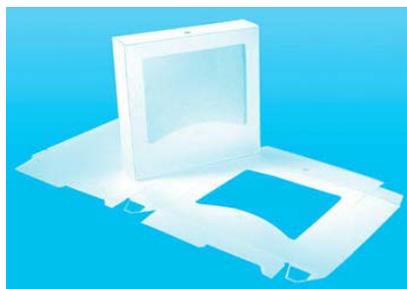

Composition

- High frequency welding press hydraulically operated
- High frequency generator built in the press frame
- Cutting press hydraulically operated
- 4 working stations turntable with adjusting rotation speed
- Nr. 2 Hydraulic power pack
- Liquid circulation refrigerating unit (on demand)
- Control panel with PLC and touch screen

Technical characteristics

| | |
|---|---|
| Welding press maximum closing force (adjustable): | 2500 kg |
| Welding press electrodes-holder plate dimension: | 700x800 mm |
| Welding press working plate dimension: | 700x800 mm |
| Cutting press maximum closing force (adjustable): | 10000 kg / 20000 kg |
| Cutting press electrodes-holder plate dimension: | 700x800 mm |
| Cutting press working plate dimension: | 700x800 mm |
| Turntable working station dimension: | 700x800 mm |
| Output power of the generator: | 12 kW / 15 kW / 20 kW |
| Feeding voltage (other voltages on demand): | 400 V (+/- 5%) – 3 PHASES + EARTH - 50 Hz |