


HS model



For the production of PP film notebook covers

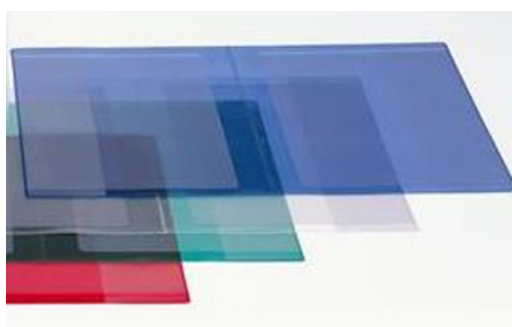

Composition

- 3-positions reels-holder with unwinder unit
- Thermocontact welding press operated through “Brushless” motor
- Indexing unit with mobile clamp operated by “Brushless” motor
- Automatic scraps removal unit
- Items stacking unit with two drawers which exchange automatically when the preset number is reached
- Liquid circulation refrigerating unit
- Control panel with PLC and touch screen

Optional units

- Cutting unit for thumb holes
- Station for label-holder pocket application with or without pre-cut label insertion
- Press hydraulically operated

Technical characteristics

Reel maximum diameter:	450 mm
Reel maximum width:	550 mm
Press upper and lower dimension:	550x450 mm
Indexing unit forward (minimum - maximum):	150 ÷ 350 mm
Press maximum closing force:	750 kg
Feeding voltage (on demand other voltages):	400 V (+/- 5%) – 3 PHASE+ EARTH - 50 Hz