



WFI model

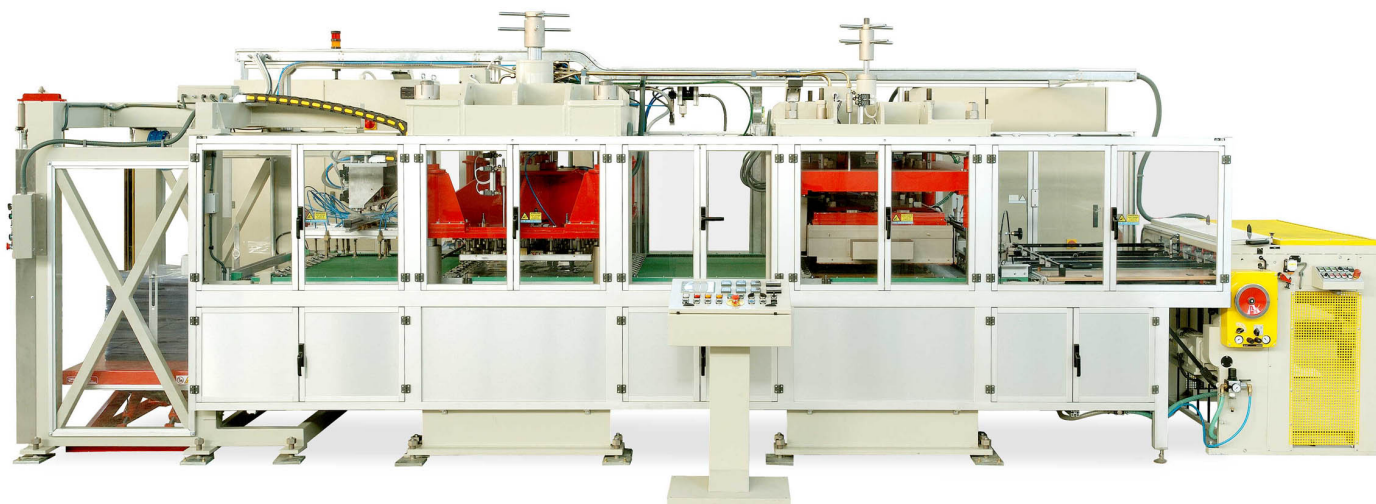

For the production of PVC, PET-G, A-PET, PET-GAG soft fold cases

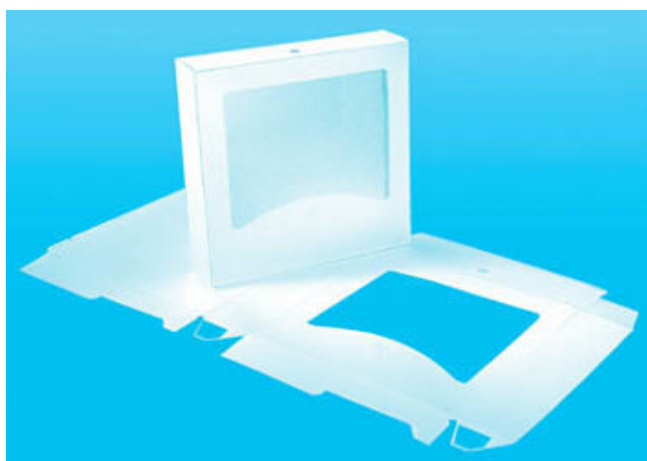

Composition

- Sheets feeding device
- Indexing unit through two side chains operated by electric motor
- High frequency welding press hydraulically operated
- High frequency generator built in separate cabinet
- Cutting press hydraulically operated
- Automatic unloader with suckers pick-up head
- Hydraulic power pack
- Liquid circulation refrigerating unit (on demand)
- Control panel with PLC and touch screen

Caratteristiche tecniche

Welding press maximum closing force (adjustable):	7500 kg
Welding press electrodes-holder plate dimension:	760x1020 mm
Welding press working plate dimension:	820x1120 mm
Cutting press maximum closing force (adjustable):	60000 kg
Cutting press punch-holder plate dimension:	760x1100 mm
Cutting press working plate dimension:	770x1100 mm
Sheets maximum dimension:	750x1050 mm
Creasing capacity:	24 metri lineari (PVC - 0.35 mm)
Cutting capacity:	24 metri lineari (PVC - 0.35 mm)
Output power of the generator:	20 kW / 30 kW
Feeding voltage (other voltages on demand):	400 V (+/- 5%) – 3 PHASES + EARTH - 50 Hz