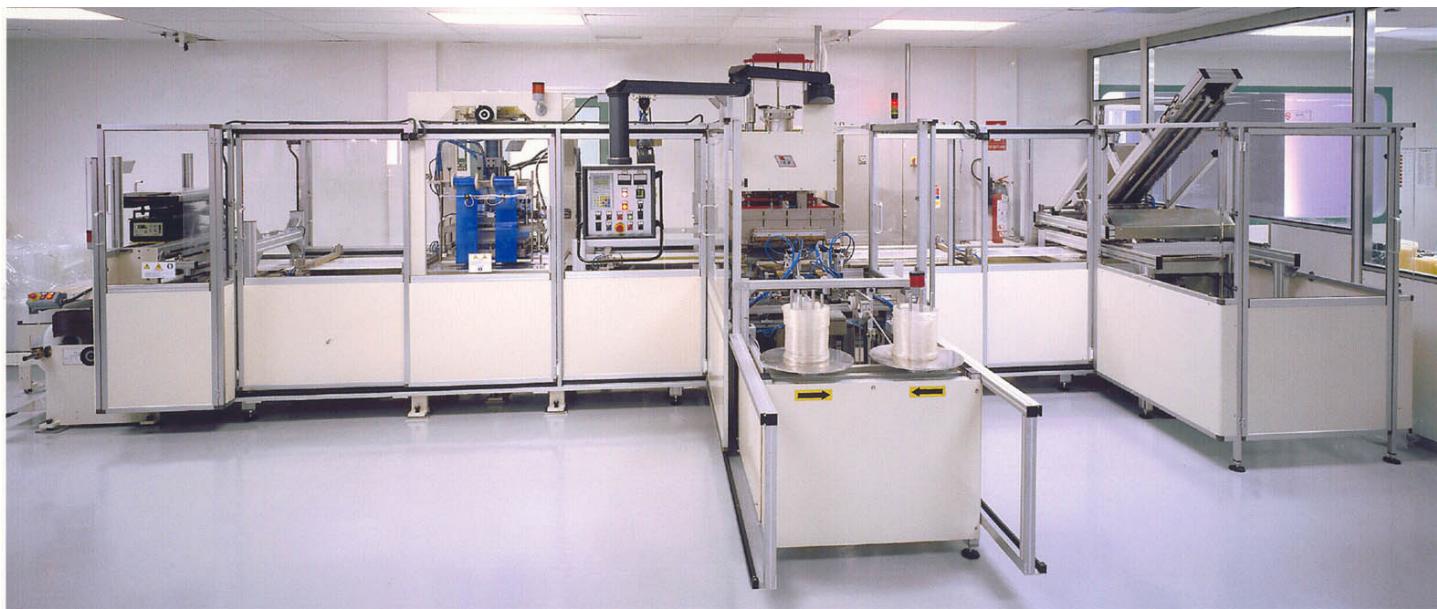


UNILINE


For the production of nutrition bags in EVA film monolayer


Composition

- Reels-holder for tubular film
- Hot printing unit (optional)
- Tubes automatic unwinding, cutting and positioning
- High frequency welding press pneumatically operated or with servo-motor
- High frequency generator built inside the press frame
- Indexing device by a mobile clamp operated by a “Brushless” motor
- Automatic scraps removal unit
- Control panel with PLC and touch screen

Technical Characteristics

| | |
|---|---|
| Reel maximum diameter: | 400 mm |
| Reel maximum width: | 450 mm |
| Press maximum closing force: | 1600 kg |
| Press upper plate dimension: | 450x600 mm |
| Indexing unit forward (minimum - maximum): | 150 ÷ 520 mm |
| Output power of the generator: | 15 kW |
| Feeding voltage (on demand other voltages): | 400 V (+/- 5%) – 3 PHASES + EARTH - 50 Hz |