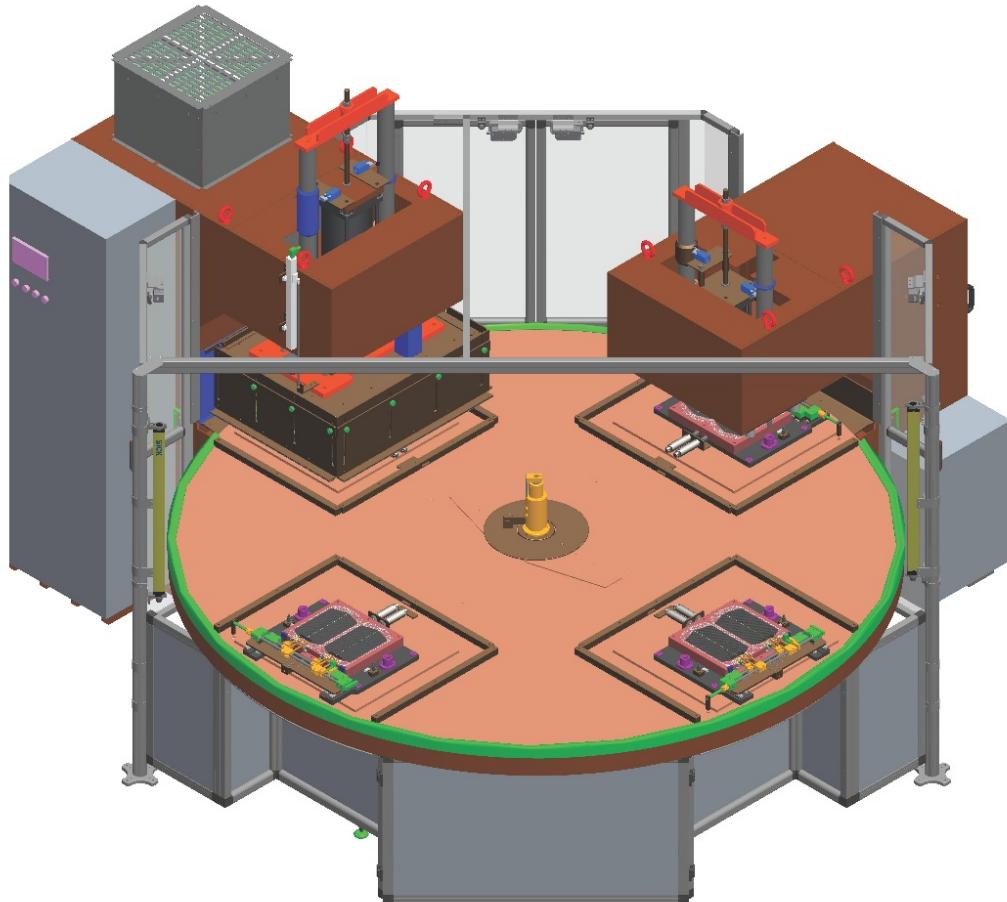


**GMA-D + PDT - 4 stations**


For the production of plasma bags in EVA film


**Composition**

- High frequency welding press hydraulically operated (or with servo-motor)
- High frequency generator built in the press frame
- Cutting press hydraulically operated (or with servo-motor)
- Turntable with 4 working stations and adjustable rotating speed
- Nr. 2 Hydraulic power pack
- Working stations and welding press refrigerating liquid circulation (on demand)
- Control Panel with PLC and touch screen

**Technical Characteristics**

Welding press maximum closing force (adjustable):	2500 kg
Welding press electrode-holderplate dimension:	600x800 mm
Cutting press maximum closing force (adjustable):	10000 kg / 20000 kg
Cutting press punch-holder plate dimension:	600x800 mm
Turntable working station dimension:	600x800 mm
Output power of the generator:	15 kW / 20 kW
Feeding voltage (other voltages on demand):	400 V (+/- 5%) – 3 PHASES + EARTH - 50 Hz