


UNILINE



For the production of extruded EVA film plasma bags

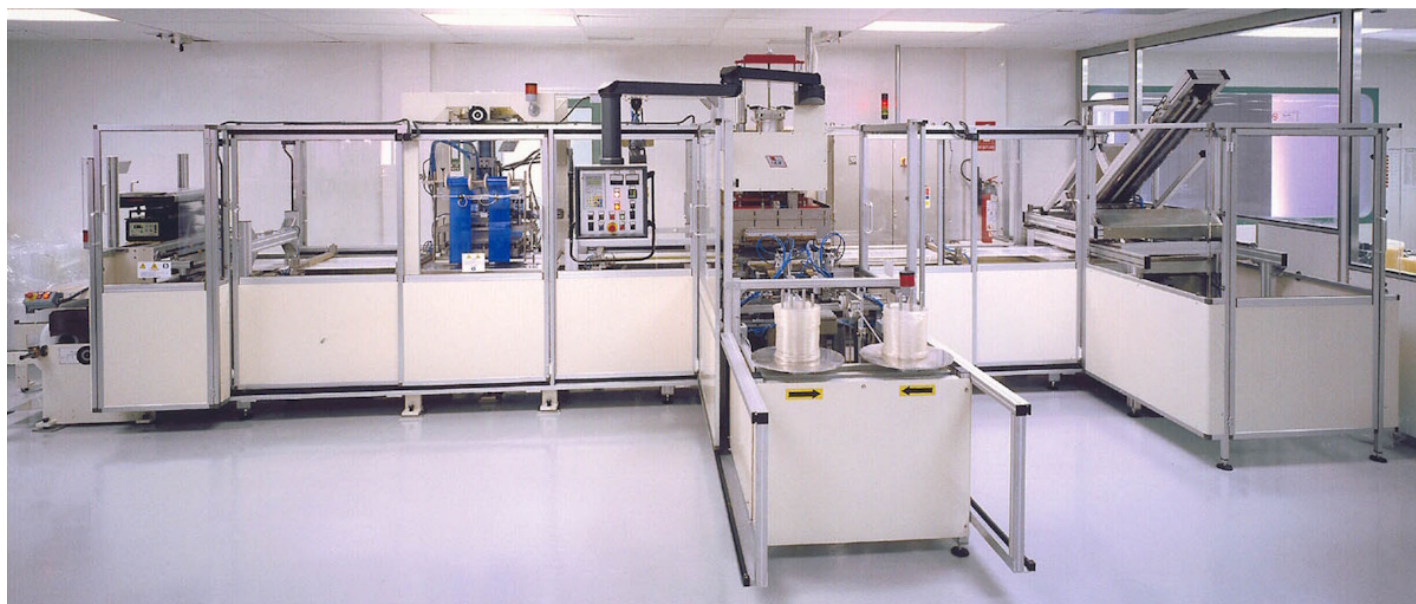

Composition

- Reels-holder for tubular film reels
- Hot printing unit (optional)
- Automatic unit of tubes unwinding, cutting and insertion
- High frequency welding press pneumatically operated or with servo-motor
- High frequency generator built in the press frame
- Indexing device by a mobile clamp operated by a “Brushless” motor
- Scraps automatic removal unit
- Control panel with PLC and touch screen

Technical characteristics

Reels maximum diameter:	400 mm
Reels maximum width:	450 mm
Press maximum closing force:	1600 kg
Press upper plate dimension:	450x600 mm
Indexing unit forward (minimum - maximum):	150 ÷ 520 mm
Output power of the generator:	15 kW
Feeding voltage (other voltages on demand):	400 V (+/- 5%) - 3 PHASES + EARTH - 50 Hz